




Y:\0000\CADD STANDARDS\DETAILS\City Details\Easton MD\DETAILS\PW-4.03.dwg Sep 17 2014 - 11:40am. (merfj)

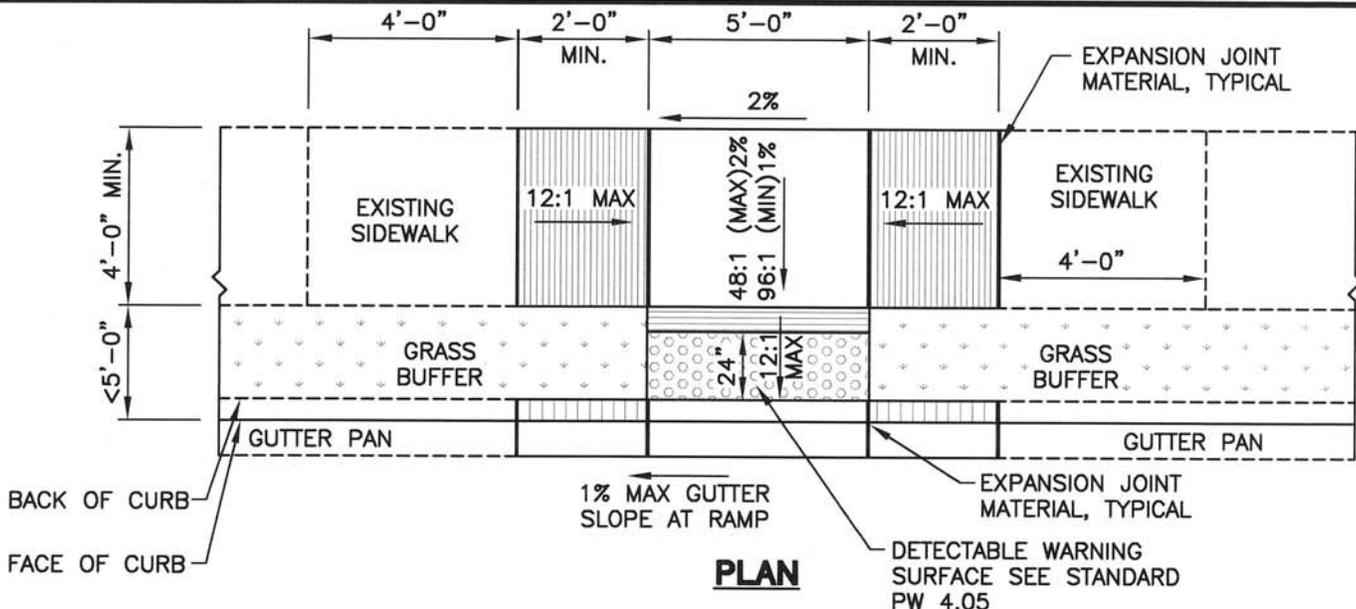

PLAN

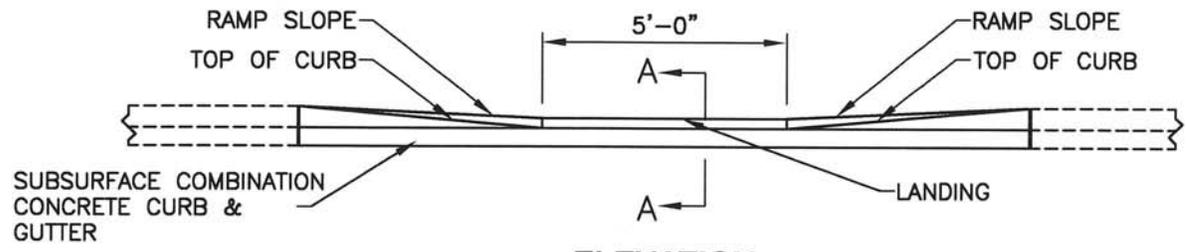

ELEVATION

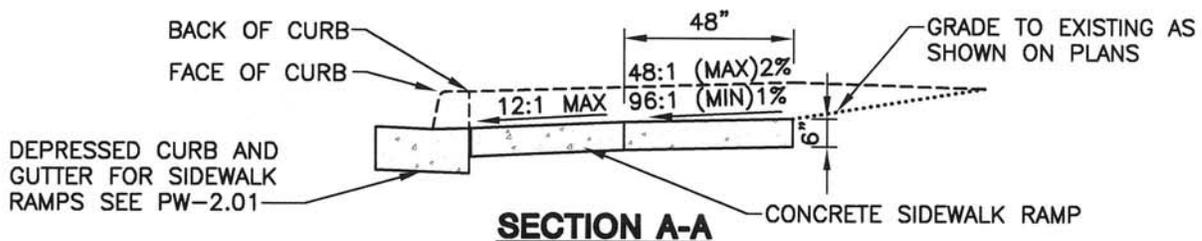

SECTION A-A

NOTES:

1. SURFACE TEXTURE OF RAMPS SHALL BE COARSE BROOMING OR NON-SKID TYPE SURFACE.
2. NO TRAVERSABLE SLOPE ON THE RAMP OR SIDEWALK SHALL EXCEED 12:1 IN THE DIRECTION OF PEDESTRIAN TRAVEL, OR 48:1 (2%) PERPENDICULAR TO THE DIRECTION OF PEDESTRIAN TRAVEL.
3. TO BE USED IN SITUATION WHERE LESS THAN 5'-0" EXISTS BETWEEN THE FACE OF CURB AND THE FRONT OF SIDEWALK.
4. HANDICAPPED RAMPS SHALL BE REINFORCED WITH 6x6 W1.4xW1.4 WELDED WIRE MESH.
5. AT NO POINT SHALL THE SLOPE OF THE LANDING BE GREATER THAN 48:1 (2%), INCLUDING DIAGONAL.
6. THERE SHALL BE A LANDING PRIOR TO THE RAMPS. THE LANDING SHALL BE 36" IN LENGTH, MINIMUM.

APPROVAL

[Signature] 9/17/14
 TOWN ENGINEER DATE

REVISED

FEB 25, 09
 JAN 1, 11
 SEP 17, 14

TOWN OF EASTON
 AND
 EASTON UTILITIES
 STANDARD DETAILS
 TYPE "D" SIDEWALK
 RAMP FOR RETROFIT

ISSUED: MAR 26, 2007

STANDARD NO. PW-4.03